
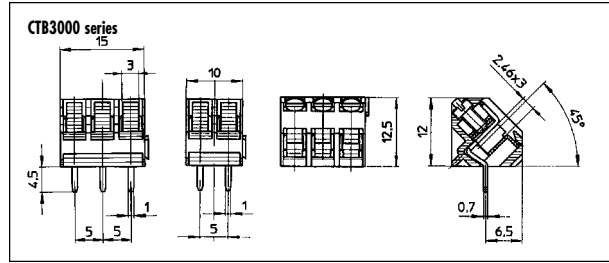


5mm Pitch 45° Low Profile Rising Clamp Terminal

Features

- 2 & 3 pole interlocking
- 4-12 pole pre-assembled
- 45° mounting
- Moulded in grey UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 4mm² cable entry / 12 AWG
-  & CE approved
- cUL applied
- Captive screw




Type No.	Poles	Length
CTB3000/2	2	10mm
CTB3000/3	3	15mm
CTB3000/4	4	20mm
CTB3000/5	5	25mm
CTB3000/6	6	30mm
CTB3000/7	7	35mm
CTB3000/8	8	40mm
CTB3000/9	9	45mm
CTB3000/10	10	50mm
CTB3000/11	11	55mm
CTB3000/12	12	60mm


Specification

Rating	17.5A/250V
Dielectric strength	1.25kV/60secs
Insulation resistance	5M
Working temperature	-20°C to 125°C
Short period	160°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	5 micron tinned, nickel plated brass
Rising clamp	Zinc plated steel
Screw/torque	M2.5 steel, 6µ zinc colour passivated and tropicalised/0.4Nm
Recommended PCB hole size	ø1.3mm

5mm Pitch Double Decker Rising Clamp Terminal

Features

- 4 & 6 pole Double interlocking mechanism for increased strength
- Double decker
- Moulded in grey UL94-V0 flame retardant
- Professional rising clamp terminals
- 4mm² cable entry / 12 AWG
-  & CE approved
- cUL applied
- Guided pin alignment

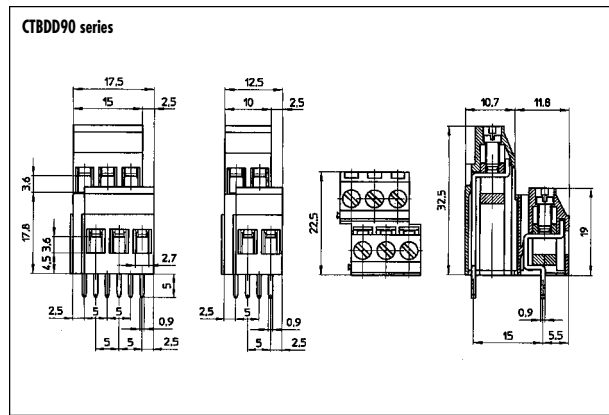

Type No.	Poles	Length
CTBDD90/2	4	12.5mm
CTBDD90/3	6	17.5mm

Specification

Rating	24A/380V
Dielectric strength	2.5kV
Insulation resistance	5M
Working temperature	-20°C to 125°C
Short period	160°C
Moulding	UL94-V0 flame retardant PA66

Pin/terminal	5µ tinned, nickel plated brass
Rising clamp	5µ nickel plated brass
Screw/torque	M3 steel, 6µ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size	ø1.3mm